


Maintaining LPTV Reception


(For DTV Converter Boxes without Analog Pass-through)

For TV Sets With “Line” or “Video and Audio” Inputs

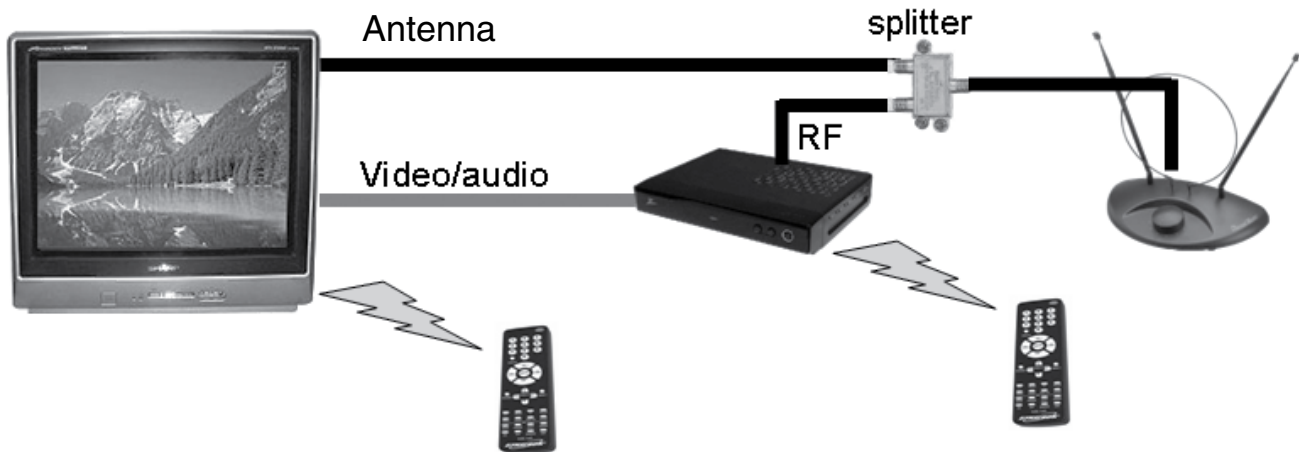

Connect the antenna to the input of the splitter. Connect one output of the splitter to the antenna input on the converter box and the other splitter output to the antenna input on the TV set. Then connect the converter box “video and audio” outputs to the TV using the “line” or “video and audio” input connections. To watch low-power analog stations, set the TV to “antenna” for its source and use the tuner in the TV set. The converter box is used to tune digital stations, using the “line” input on the TV. If needed, the splitter can be replaced with the A/B switch, if the signal breaks up when the splitter is used.

For TV Sets Without “Line” or “Video and Audio” Inputs

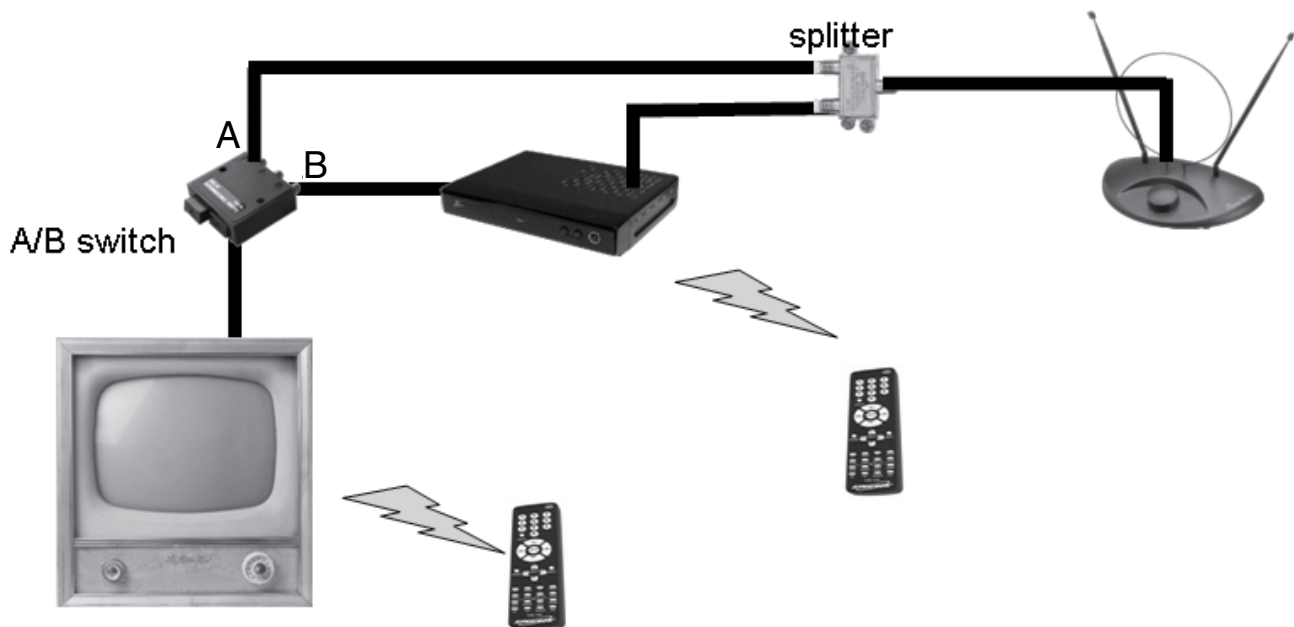

Connect the antenna to the input of the splitter. Connect one of the splitter outputs to the converter box antenna input. Connect the other output of the splitter to the A input of the A/B switch. Connect the B input of the A/B switch to the antenna output of the converter box. Connect the output of the A/B switch to the antenna input on the TV set. The TV is set to “antenna” for its source. To view low-power analog stations, put the A/B switch in the A position and use the tuner in the TV set. To watch digital stations, tune the TV to channel 3 or 4, put the A/B switch in the B position, and use the converter box to tune the digital channels.